

# MARION COUNTY SURVEYOR'S OFFICE





## SECTION CORNER RECORD

DEBRA S. JENKINS  
MARION COUNTY SURVEYOR

SEC. 6 TWN. 14<sub>N</sub> RNG. 3<sub>E</sub>

BRYAN F. CATLIN, PLS  
TECHNICAL SUPERVISOR

Date: 4-16-10  
Party Chief: Wilcoxon  
Crew: Finney  
Type of Marker: 5/8" rebar found 3" down  
Method of Establishment: County: 2-28-2000  
NOTE: Found as per deeds  
IN S.P.C. E Zone, NAD 83 (1986)  
Name: 14030604  
N: 492 703.313 9(m)  
E: 49 917.886 6(m)  
Note: Corner is approx. 40'  
S of edge of pavement

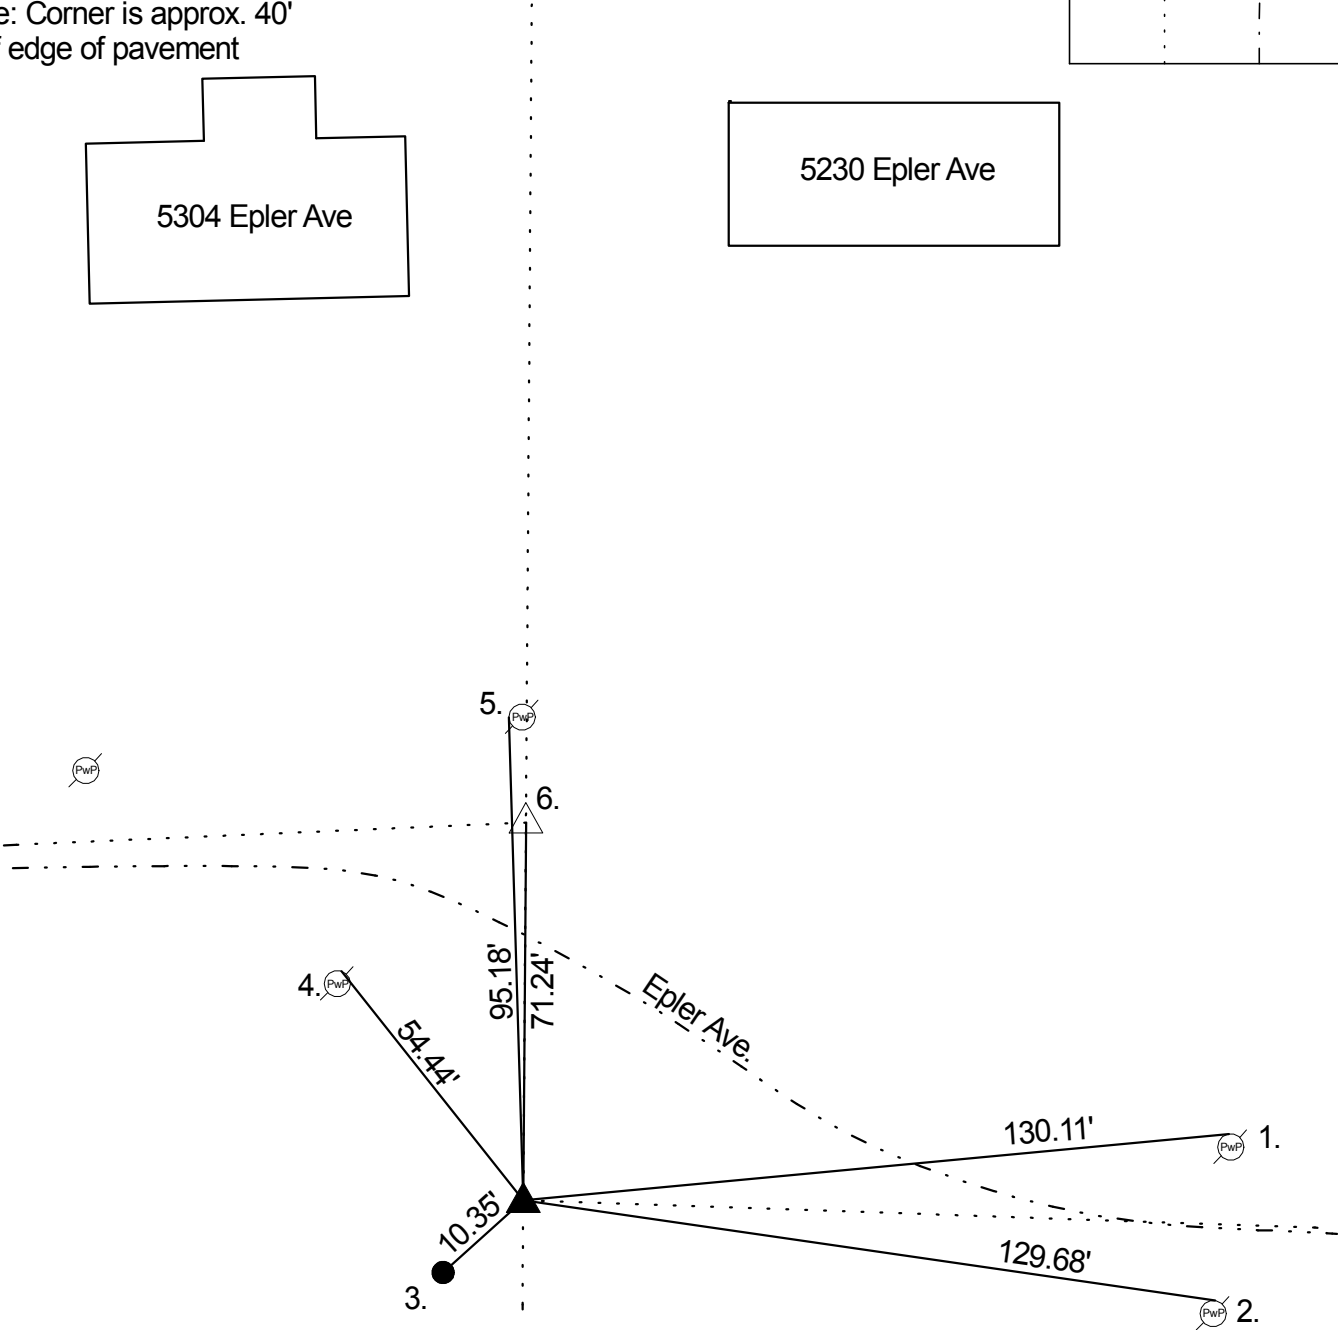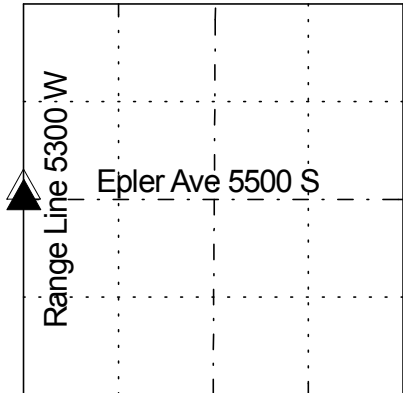

Percy Hasbrook 3/1/1852 "found stump for half mile for Range 2 then 114 south set stake and took witnesses as follows, Elm 6 S 68°W 4 lks Sugar 6 N 44°E 28 links" (Decatur Twp. Legal Survey Book pg. 10). Hervey B. Fatout 10/9/1884 indicates corner but did not describe (Decatur Twp. Legal Survey Book pg. 35). Survey by Dale G. Gard of Joe Rand Beckett farm dated 10/11/1968 (MCSO drawer 66, sheet 369) shows iron pin 8" down 71.36' S. of pipe at east quarter corner of 1-14-2. Wilcoxon 2/28/2000 found 1/2" rebar 8" down per deeds. Wilcoxon 4/16/2010 found 5/8" rebar. A search was made four feet south for evidence of a monument with none found.

REF	DISTANCE	DESCRIPTION
1.	130.11'	Mag nail w/brass washer N PwP #22-686 5" up
2.	129.68'	Mag nail w/brass washer N guide pole 12" up
3.	10.35'	Top of steel post of buried cable sign
4.	54.44'	Mag nail w/brass washer NE PwP #344-685 60" up
5.	95.18'	PK nail W #52-686 10" up
6.	71.24'	Due N to E 1-14-2 (Harrison)